
## Tele2Fiph

## Wireless 2ch Fiberphotometry

Tele2Fipho is a 2 channel version of our established TeleFipho wireless fiber photometry system. By specifying the length and interval of the dedicated dual cannula when ordering, you can collect wireless photometry signals from two separate positions together with the Tele2Fipho 2 position headstage. It is suitable for recording from bilateral hemisperes or afferent two brain regions, etc., in a freely moving mouse. Tele2Fipho receiver receiving wireless signal from the headstage is connected to a PC via USB to visualize the 2 channel photometry signals in real time. The reciever has 2 channel analog output so the photometry signals can be recorded in an external data acquisition system as well.



Tele2FiCD-l-i \*


-		
1x	Tele2FiT-2P	Tele2Fipho 2 position headstage
1x	Tele2FiR	Tele2Fipho receiver
1x	Tele2FiTool	Stereotaxic adapter for dual cannula
1x	Tele2FiDummy	Tele2Fipho dummy headstage
1x	TeleFiCharger	Headstage Charger

Dual cannula

\* I: fiber length (mm), i: fiber interval (mm)

ie .

Specification	
Headstage weight	4g
Headstage size	20 x 15 x 22 mm
Excitation Wavelength	Filter band 445 ~ 490nm
Emission Wavelength	Filter band 500 ~ 550nm
Excitation power	3 ~ 100µW@250µm fiber end
Sampling rate	50Hz/ch
ADC resolution	16bit
Battery life	2 hours @ Ex. power 15µW
Transmission band	2.4GHz
Transmission distance	2m
Power	Battery powered, rechargeable
Receiver I/O	2x photometry analog out 1x general purpose analog in (0~5V)
PC Interface	USB / Tele2Fipho Software (Win11)
Dual cannula	250μm/NA0.50 Interval 0.5 ~ 10mm, 0.1mm res.

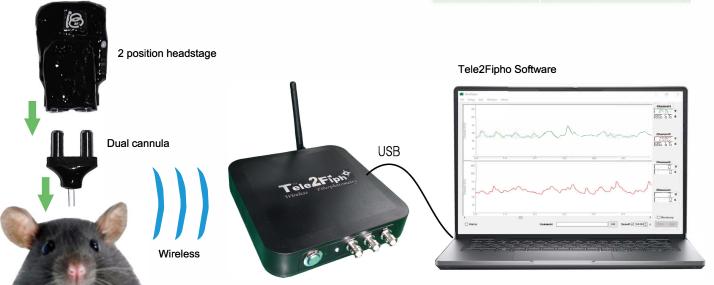

Tele2Fipho Receiver

GCaMP/GRAB mouse

In US & Canada:

AMUZA INC

10060 Carroll Canyon Road, Suite 100, San Diego, California, USA, 92131
URL: https://amuzainc.com
Tel: (858) 225-6869 Fax (858) 560-8040

